



UNDERDRAIN



1. GRADE FOR UNDERDRAIN PIPE SHALL BE PARALLEL WITH THE GRADE OF THE ROAD UNLESS OTHERWISE SHOWN ON THE PLANS OR AS DIRECTED BY THE ENGINEER.
2. THE UNDERDRAIN SHALL BE TAKEN TO A PROPER OUTLET AS SHOWN ON THE PLANS OR AS DIRECTED BY THE ENGINEER.
3. ELBOWS, T'S, AND OTHER JUNCTION UNITS NECESSARY FOR PROPER INSTALLATION OF THE UNDERDRAIN, AS DIRECTED BY THE ENGINEER, SHALL BE INCLUDED IN THE UNIT BID PRICE FOR UNDERDRAIN OR CARRIER PIPE.
4. A YIELDING MARKER POST SHALL BE PLACED NEXT TO THE FLUSHING BASIN OR AS DIRECTED BY THE ENGINEER.


NOT TO SCALE

Kevin L. Marshall
ROADWAY, TRAFFIC & SAFETY ENGINEER

Richard Schaub
DIRECTOR OF PROGRAM DEVELOPMENT

Marion D. Richter
FEDERAL HIGHWAY ADMINISTRATION

UNDERDRAIN CONSTRUCTION DETAILS

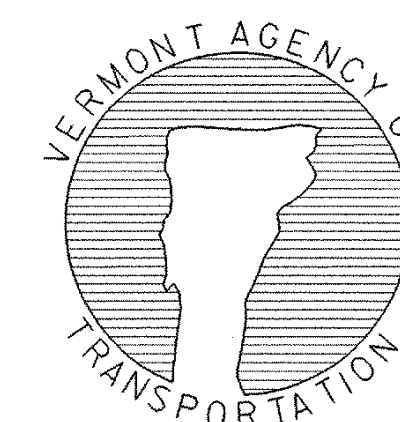

STANDARD D-30