


A SINGLE STAKE MAY BE DRIVEN THROUGH THE LOG OR ONE STAKE MAY BE DRIVEN ON EACH SIDE OF THE LOG. SEE NOTE 1 FOR STAKE SPACING.

SYMBOL

EL


NOT TO SCALE

PLACE TRENCH SPOILS OR FILTER MATERIAL AS NECESSARY TO PREVENT FLOW UNDER THE LOG

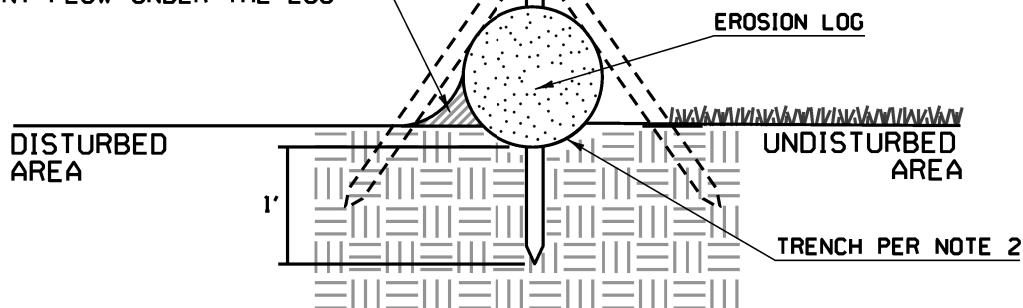

PLACE LOGS PARALLEL TO EXISTING CONTOURS

CROSS SECTION

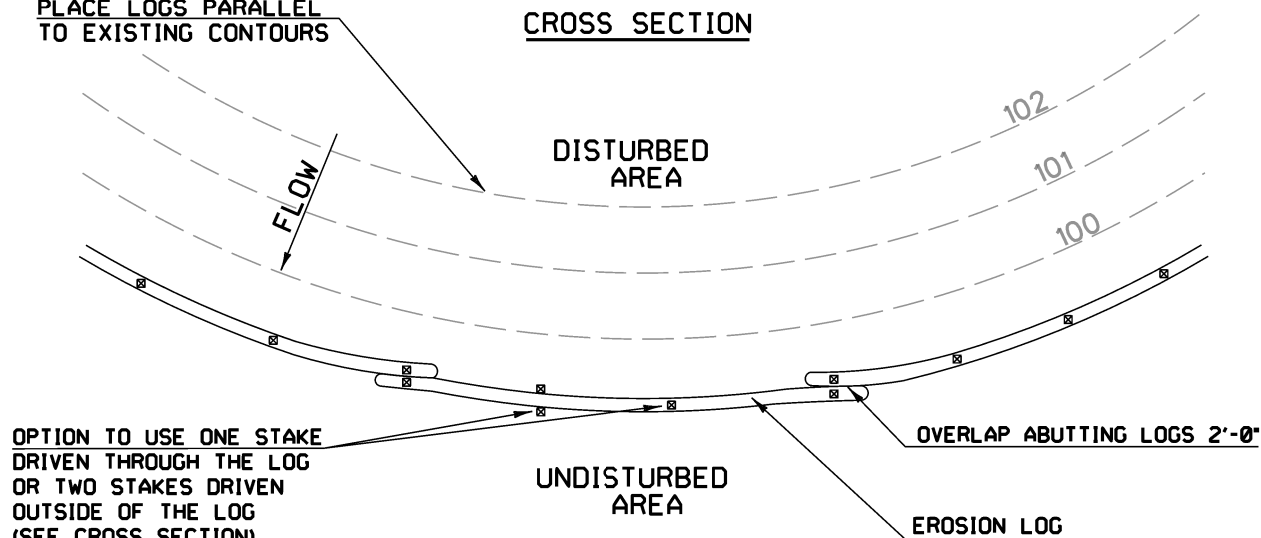

NOTES:

1. STAKE PLACEMENT WILL VARY BASED ON LOG TYPE, MANUFACTURER'S RECOMMENDATIONS, AND FIELD CONDITIONS. LOGS SHALL BE STAKED SO AS TO PROVIDE CONTINUOUS CONTACT BETWEEN THE LOG AND THE GROUND. STAKE SPACING SHALL NOT EXCEED 10' ON CENTER.
2. REMOVE GROUND LITTER AND TRENCH 2' TO 3' AS NECESSARY TO ACHIEVE GOOD GROUND CONTACT. PLACE AND COMPACT EXCAVATED MATERIAL ON THE UPSLOPE SIDE OF THE LOG OR WASTE AT APPROVED LOCATION.
3. WHEN ACCUMULATED SEDIMENT IS NOTED IT SHALL BE REMOVED AND WASTED IN AN APPROVED LOCATION
4. RESHAPE OR REPLACE LOG ONCE CAKED OR FLATTENED.

ADAPTED FROM DETAILS PROVIDED BY:

VERMONT DEPARTMENT OF ENVIRONMENTAL CONSERVATION
NEW YORK STATE DEPARTMENT OF ENVIRONMENTAL CONSERVATION

EROSION LOG (EL)

NOTES:

REFER TO LATEST EDITION OF "THE VERMONT STANDARDS & SPECIFICATIONS FOR EROSION PREVENTION & SEDIMENT CONTROL" FROM THE VT AGENCY OF NATURAL RESOURCES FOR ADDITIONAL GUIDANCE.

THIS WORK SHALL BE PERFORMED IN ACCORDANCE WITH SECTION 653 FOR EROSION LOG (PAY ITEM 653.6000).

REVISIONS

APRIL 1, 2008	WHF
JANUARY 13, 2009	WHF
NOVEMBER 27, 2024	CMMJ