



SYMBOL



NOT TO SCALE

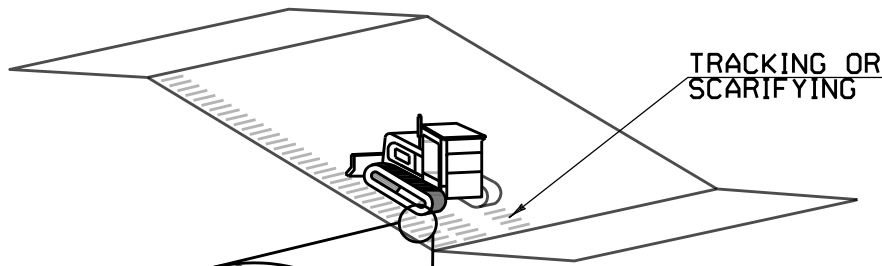


TRACKING OR
SCARIFYING

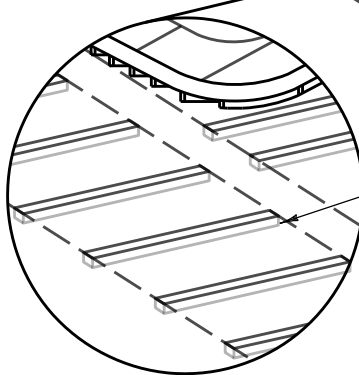


FURROWS 2" TO 4" DEEP AND
PARALLEL TO CONTOURS

SURFACE ROUGHENING
(ALL SLOPES)

SCARIFYING
OR TILLING

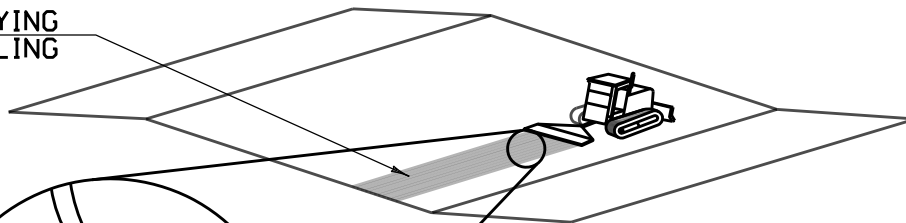

ROUGHENED ROWS SHALL BE
4" TO 6" DEEP AND PARALLEL
TO CONTOURS

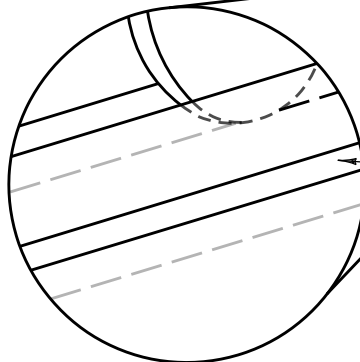

TILLING OPTION FOR LARGE AREAS
WITH SLOPES LESS THAN 3:1

NOTES:

1. GROOVES MAY BE MADE WITH ANY APPROPRIATE PIECE OF EQUIPMENT THAT CAN BE SAFELY OPERATED ON, OR ADJACENT TO, THE SLOPE. SURFACE ROUGHENING SHALL BE ACCOMPLISHED IN A MANNER THAT LIMITS SOIL COMPACTION AND PROMOTES TURF ESTABLISHMENT.

2. FOR AREAS THAT WILL BE MOWED, SURFACE ROUGHENING SHOULD CONSIST OF GROOVES CREATED BY NORMAL TILLING, DISKING, HARROWING, OR USE OF A CULTIPACKER SEEDER. SURFACE ROUGHENING SHALL NOT CREATE A SURFACE THAT CAN NOT BE MOWED.

ADAPTED FROM DETAILS DEVELOPED BY:
VERMONT DEPARTMENT OF CONSERVATION

MILE HIGH FLOOD DISTRICT STORMWATER
BEST MANAGEMENT PRACTICES

SURFACE ROUGHENING

NOTES:

REFER TO LATEST EDITION OF "THE VERMONT STANDARDS & SPECIFICATIONS FOR EROSION PREVENTION & SEDIMENT CONTROL" FROM THE VT AGENCY OF NATURAL RESOURCES FOR ADDITIONAL GUIDANCE.

THIS WORK SHALL BE CONSIDERED INCIDENTAL TO ALL OTHER CONTRACT ITEMS.

REVISIONS

APRIL 1, 2008	WHF
JANUARY 13, 2009	WHF
NOVEMBER 25, 2024	CMMJ