

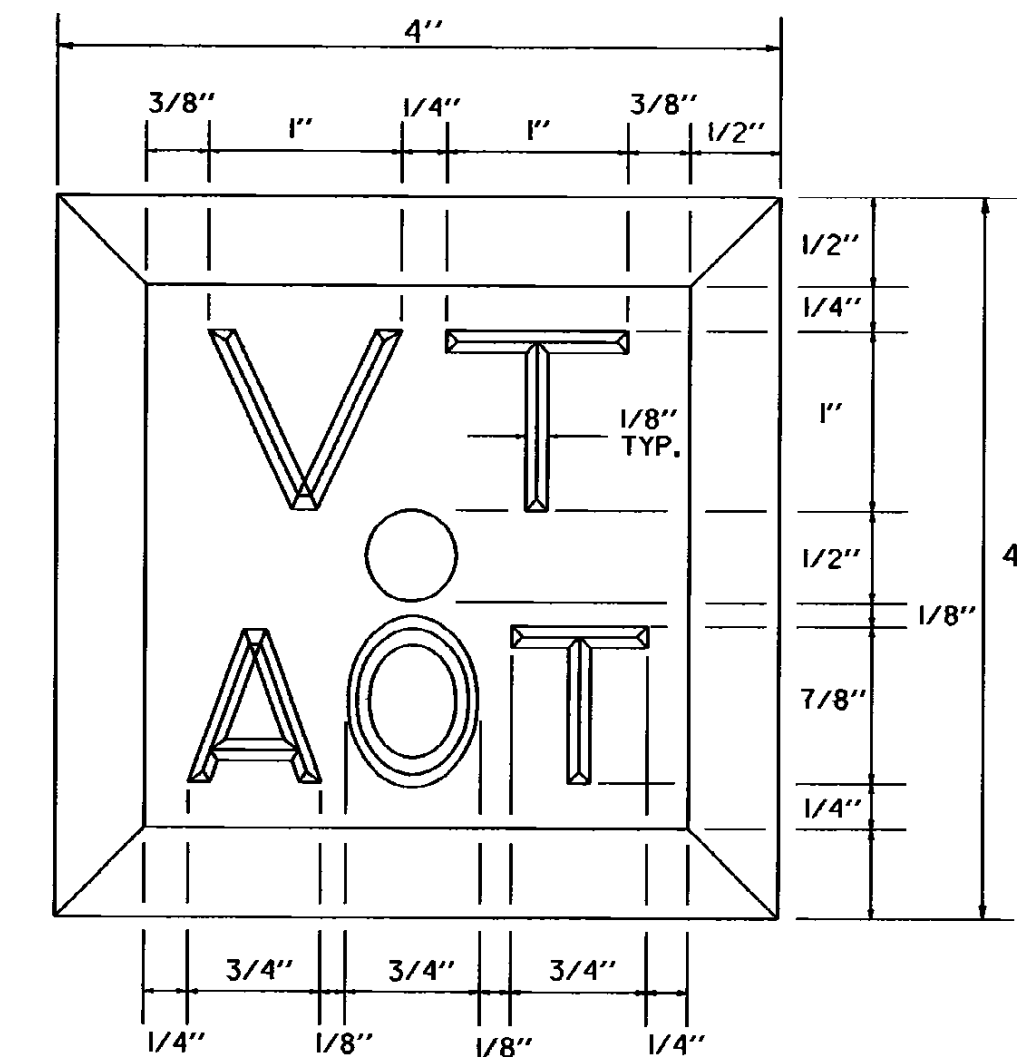
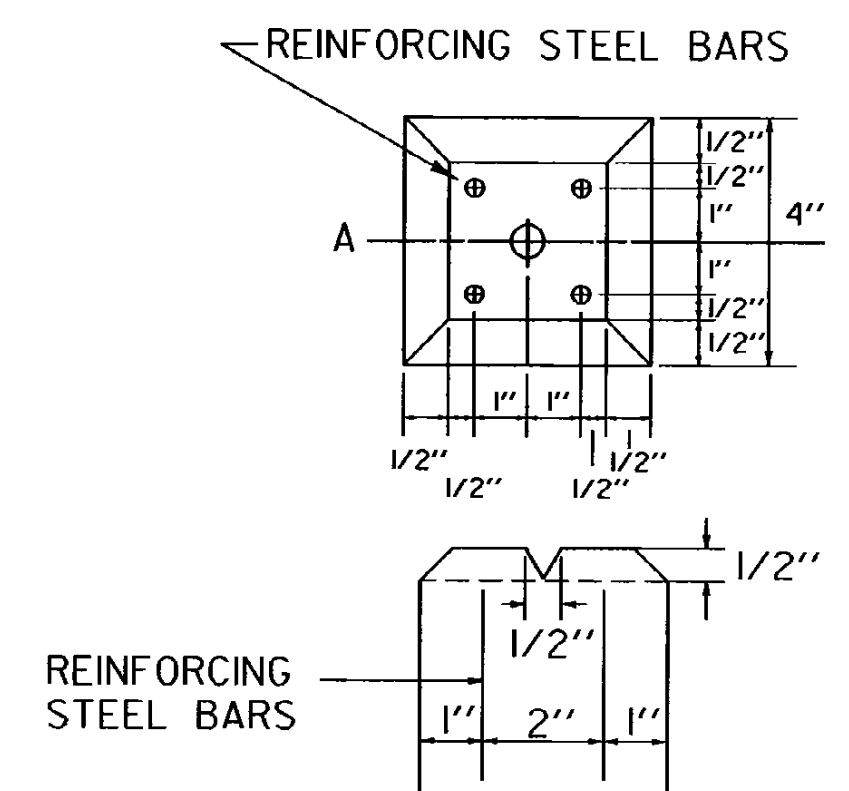


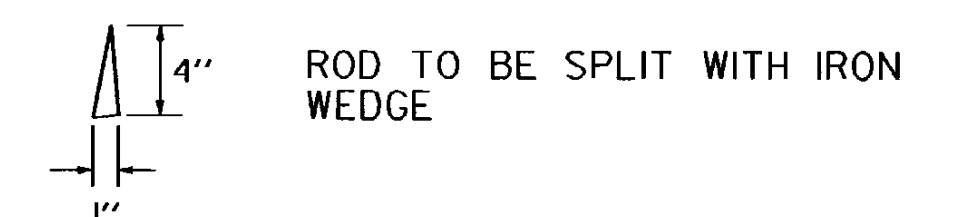


LETTERING DETAIL
(ALL LETTERS TO BE COUNTERSUNK 1/8")
SCALE: FULL SIZE

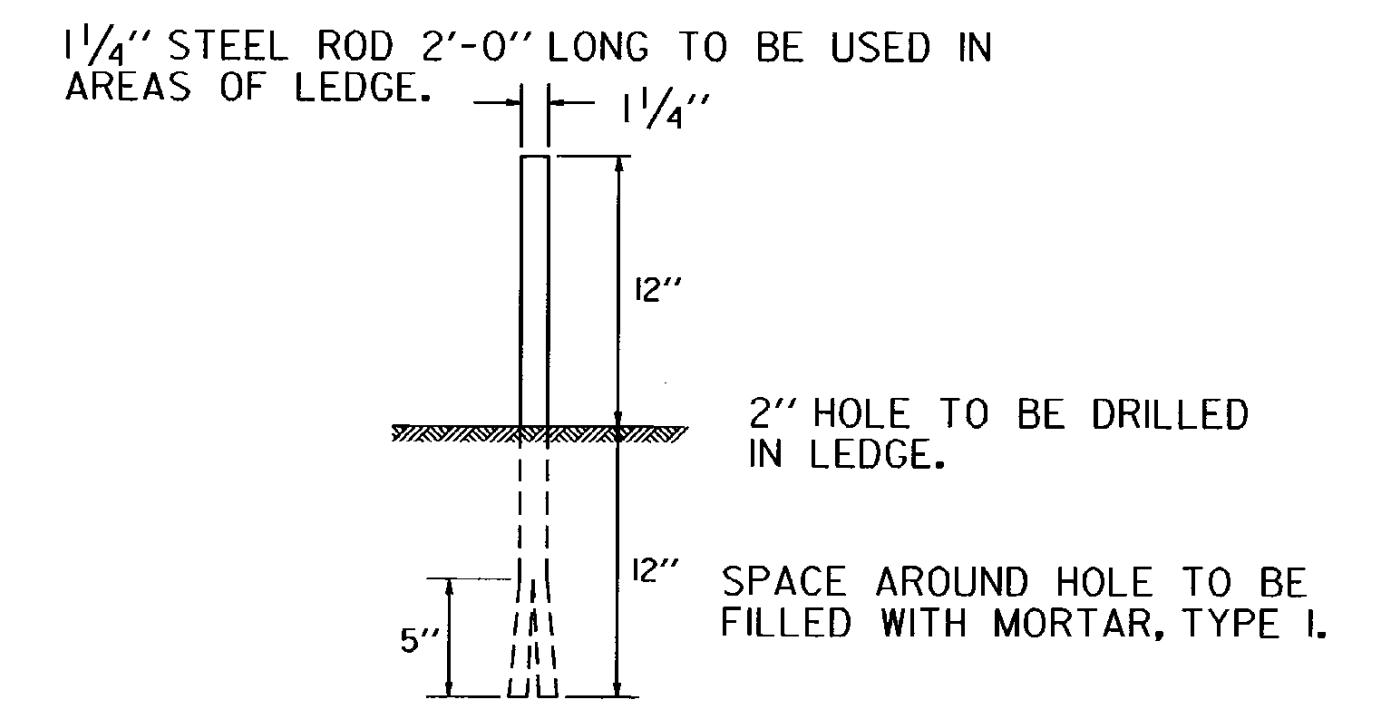

SECTION A-A

BOUNDARY MARKERS TO BE CONSTRUCTED OF CONCRETE CLASS A.
4 REINFORCING STEEL BARS ARE NO.3 DEFORMED BARS 4'-4" LONG.
BOUNDS ARE TO BE SET WITH 6" ABOVE GROUND, OR AS DIRECTED BY THE ENGINEER.
IN AREAS WHERE MOWING OPERATIONS ARE REQUIRED, BOUNDS SHALL
BE SET FLUSH WITH THE GROUND.

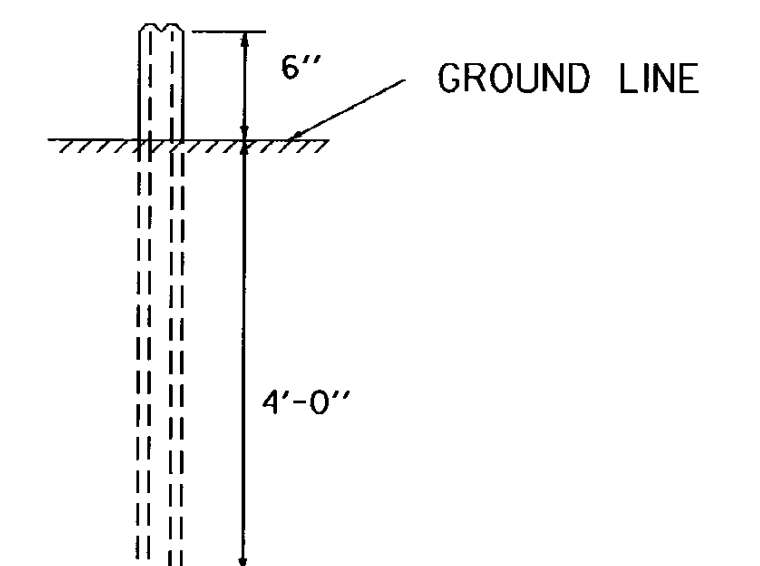

BOUNDARY MARKERS

REVISIONS AND CORRECTIONS
JUNE 27, 1980 - ORIGINAL APPROVAL
JUNE 1, 1994 - REISSUED, WITHOUT CHANGE,
UNDER NEW SIGNATURES.

APPROVED

APPROVED FOR THIS PROJECT
AND/OR DESIGN IMPLEMENTATION
FHWA FINAL APPROVAL PENDING.

Gordon B. MacArthur, P.E.
DIRECTOR OF ENGINEERING

Robert M. Murphy PE
DESIGN ENGINEER

BOUNDARY MARKERS



STANDARD J-1